



深圳市一众显示科技有限公司

SHEN ZHEN TEAM SOURCE DISPLAY TECH. CO, LTD.

TFT-LCD Module Specification

Module NO.: TST020ACH03-28G

Version: V1.0

APPROVAL FOR SPECIFICATION

APPROVAL FOR SAMPLE

For Customer' s Acceptance:	
Approved by	Comment

Team Source Display:		
Presented by	Reviewed by	Organized by

Version No.	Date	Content	Remark
V1.0	2014-04-26	Initial Release	

Contents

1	Introduction-----	4
2	General specification-----	5
3	Mechanical drawing-----	6
4	Absolute maximum ratings-----	7
5	Electrical characteristics-----	7
6	Optical characteristics -----	8
7	Pin Assignment -----	11
8	Block diagram -----	13
9	LCM quality criteria-----	14
10	Packing method-----	22

1. Introduction

1.1 Scope of application

This specification applies to the Negative type TFT transmissive dot matrix LCD module that is supplied by TSDISPLAY. This LCD module should be designed for mobile phone use. LCD specification: Dots 240xRGBx320.

As to basic specification of the driver IC, refer to the IC(ILI9341) specification and datasheet.

1.2 Structure:

Double display structure:

TFT Module + FPC + BL

FULL 256k Color 2.0 inch TFT LCD size for main LCD;

One bare chip with gold bump (COG) TECH;

8 BITS MCU parallel interface;

1.3 TFT features:

Structure: TFT PANNEL+IC+FPC+BL;

Transmissive Type LCD

240 dot-source and 320 dot-gate outputs;

256 Color can be selected by software;

White LED back light;

8 BITS MCU parallel interface;

1.4 Applications:

Mobile phone

PSP

PDA


GPS

Etc...

2. General specification

ITEM	Standard value	UNIT
LCD Type	TFT Transmissive	---
Driver element	a-Si TFT Active matrix	
Number of Dots	240*(RGB)*320	Dots
Pixel Arrangement	RGB Vertical Stripe	
Active Area	30.6 *40.8	mm
Viewing Direction	6 0' clock	
Driver IC	ILI9341	
Module Size(W*H*T)	37.88x51.5x2.5	mm
Approx. Weight	TBD	g
Back Light	White LED	
System interface	8 BITS MCU parallel interface	

3. Mechanical drawing

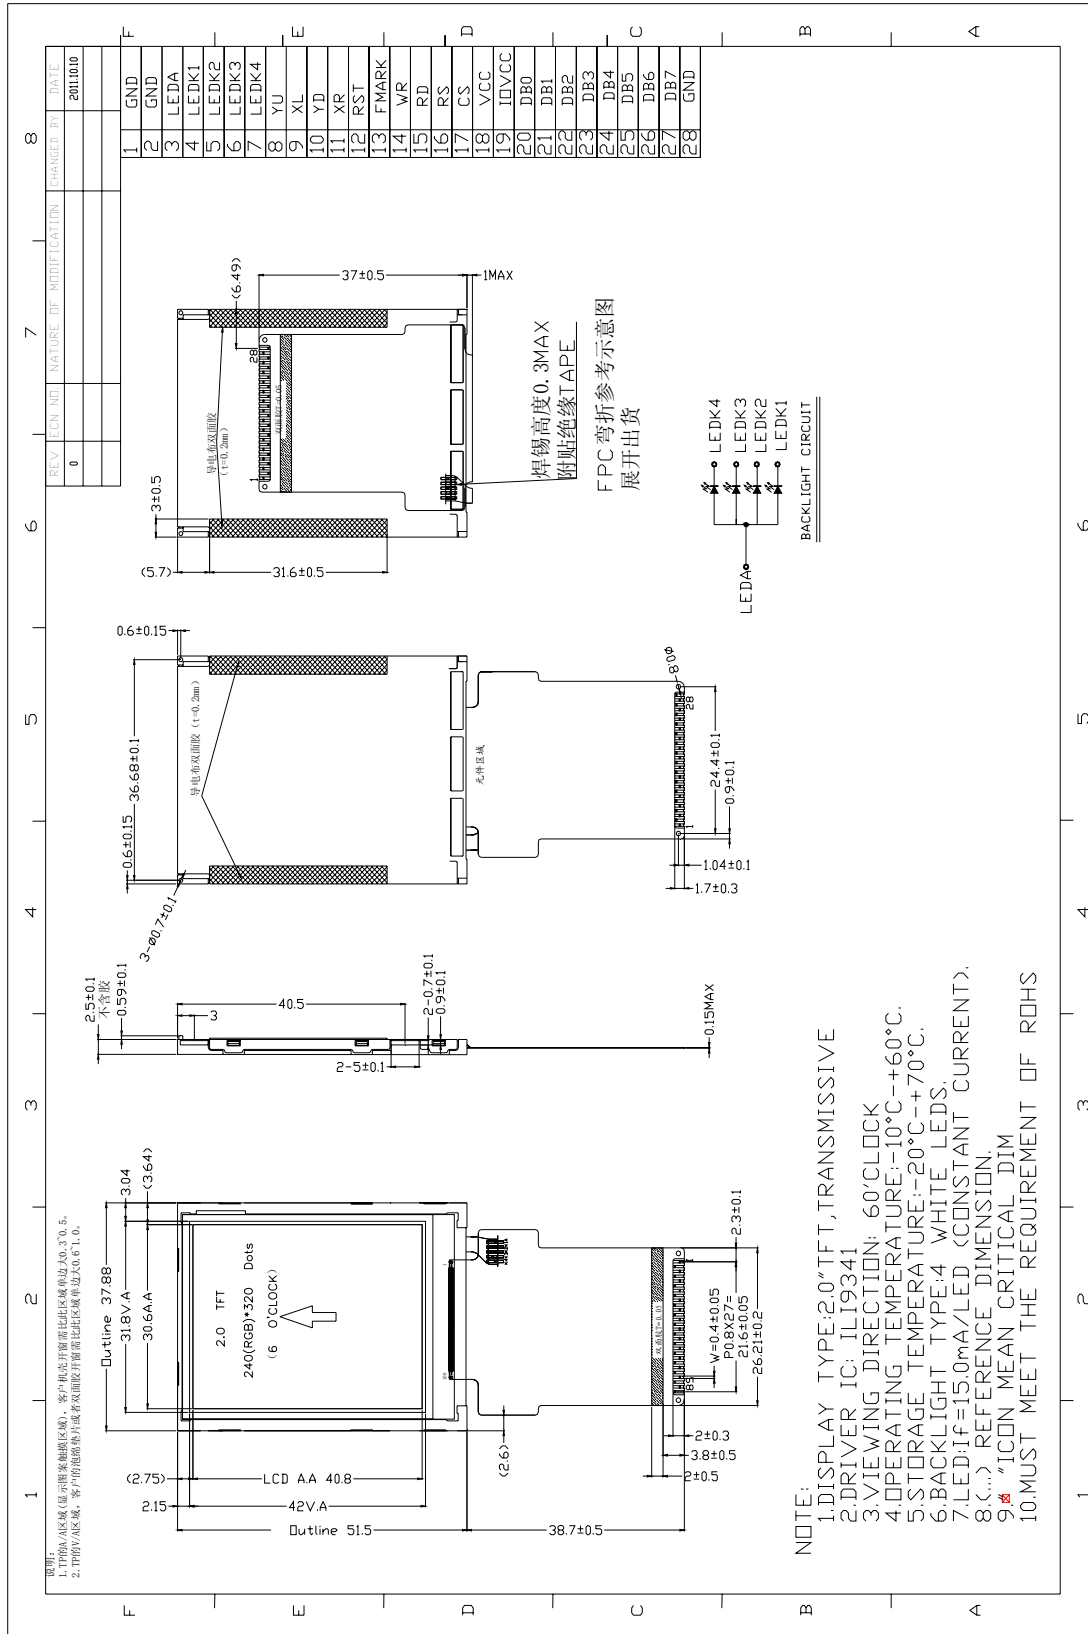

4. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit
Supply voltage for logic	VDD	-0.3	4.6	V
Input voltage for analog	VCI	-0.3	4.6	V
Supply current (One LED)	I _{LED}		30	mA
Operating temperature	T _{OP}	-20	+70	°C
Storage temperature	T _{ST}	-30	+80	°C

Note: If the absolute maximum rating of even is one of the above parameters is exceeded even momentarily, the quality of the product may be degraded. Absolute maximum ratings, therefore, specify the values exceeding which the product may be physically damaged. Be sure to use the product within the range of the absolute maximum ratings.

5. ELECTRICAL CHARACTERISTICS

Item	Symbol	Min	Typ	Max	Unit	Applicable terminal
Supply voltage for logic	VDD	1.8	2.8	3.3	V	V _{DD}
Input voltage for analog	VCI	2.5	2.8	3.3		
Input voltage	V _{IL}	-0.3	-	0.3VDD	V	
	V _{IH}	0.7VDD	-	VDD	V	
Input leakage current	I _{LKG}				μA	
LED Forward voltage	V _f	3.0	3.2	3.4	V	With One LED
Input backlight current	I _{LED}	-	15	20	mA	With One LED

BACKLIGHT DRIVING CONDITIONS


Item	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Voltage for LED backlight	V _L	3.0	3.2	3.4	V	
Current for LED backlight	I _L	--	60	80	mA	
LED life time	-	20,000	-	-	Hr	Note

Note : The “LED life time” is defined as the module brightness decrease to 50% original brightness at $T_a=25^{\circ}\text{C}$ and $I_L=60\text{mA}$. The LED lifetime could be decreased if operating I_L is larger than 60 mA.

6. OPTICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITIONS	SPECIFICATIONS			UNIT	NOTE	
			MIN.	TYP.	MAX			
Brightness	B	Viewing normal angle	200	--	--	Cd/m^2	All left side data are based on LAIBAO' s product reference only	
Contrast Ratio	CR		150	250	--	--		
Response Time	T_r+T_f		--	50	70	ms		
CIE Color coordinate	Red		X_R	--	0.633			
			Y_R		0.329			
	Green		X_G	--	0.297			
			Y_G		0.577			
	Blue		X_B	--	0.133			
			Y_B		0.129			
White	X_W		--	--				
	Y_W	--	--					
Viewing Angle	Hor.	$\ominus x+$	35	45	--	Deg.		
		$\ominus x-$	35	45	--			
	Ver.	$\ominus y+$	35	45	--			
		$\ominus y-$	15	25	--			
Uniformity	Un		80	85		%		


Note 1 : Definition of Viewing Angle θ_x and θ_y :

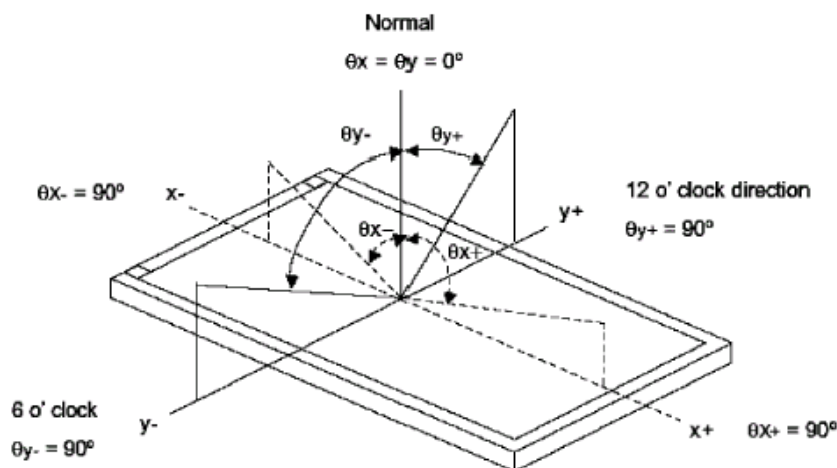


Note 2: Definition of contrast ratio CR:

$$CR = \frac{\text{Brightness of non-selected dots (white)}}{\text{Brightness of selected dots (black)}}$$


Note 3: Definition of response time (T_R, T_F)

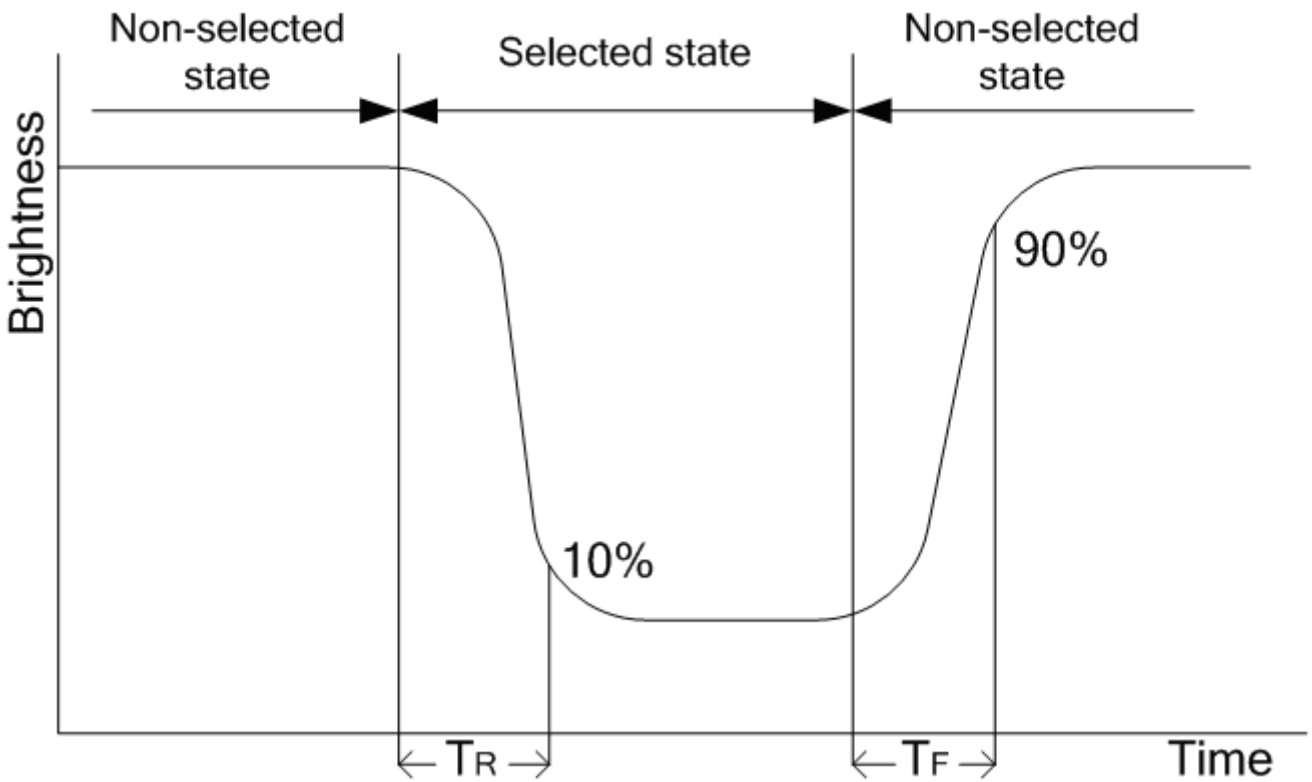

The brightness test equipment setup
 20mA Field=2° (As measuring "black" image, field=2° is the best testing condition)

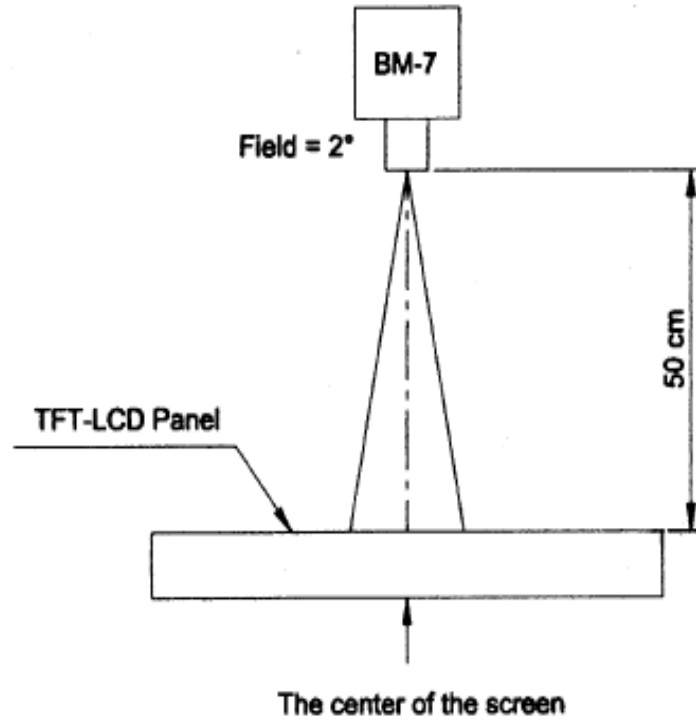


Note 4 :

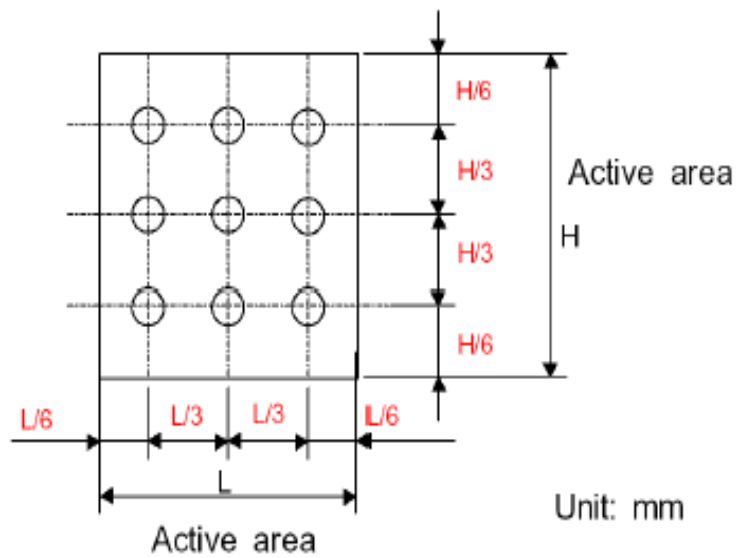


7. MCU Interface Pin Function

PIN NO.	SYMBOL	DESCRIPTION
1	GND	Ground
2	GND	Ground
3	LEDA	Anode of backlight
4	LEDK1	Cathode of backlight
5	LEDK2	Cathode of backlight
6	LEDK3	Cathode of backlight
7	LEDK4	Cathode of backlight
8	YU	Touch panel pin
9	XL	Touch panel pin
10	YD	Touch panel pin
11	XR	Touch panel pin
12	RST	Reset pin
13	FMARK	Tearing effective signal
14	WR	Severed as a write signal
15	RD	Severed as a read signal
16	RS	Command or data select
17	CS	Chip select
18	VCC	Power of supply
19	IOVCC	Digital power
20	DB0	Data bus
21	DB1	Data bus
22	DB2	Data bus
23	DB3	Data bus
24	DB4	Data bus
25	DB5	Data bus
26	DB6	Data bus
27	DB7	Data bus
28	GND	Ground

Parallel interface pause

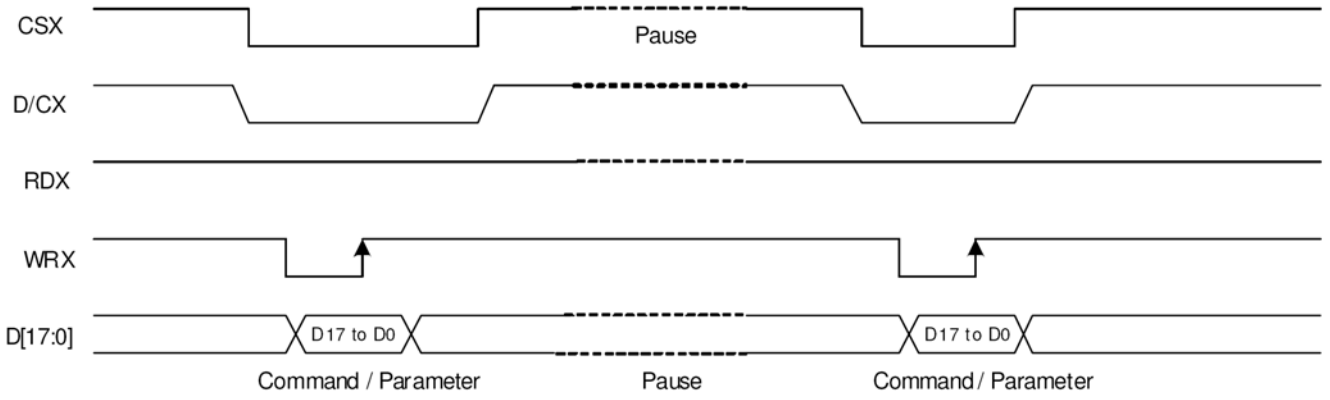

8. BLOCK DIAGRAM

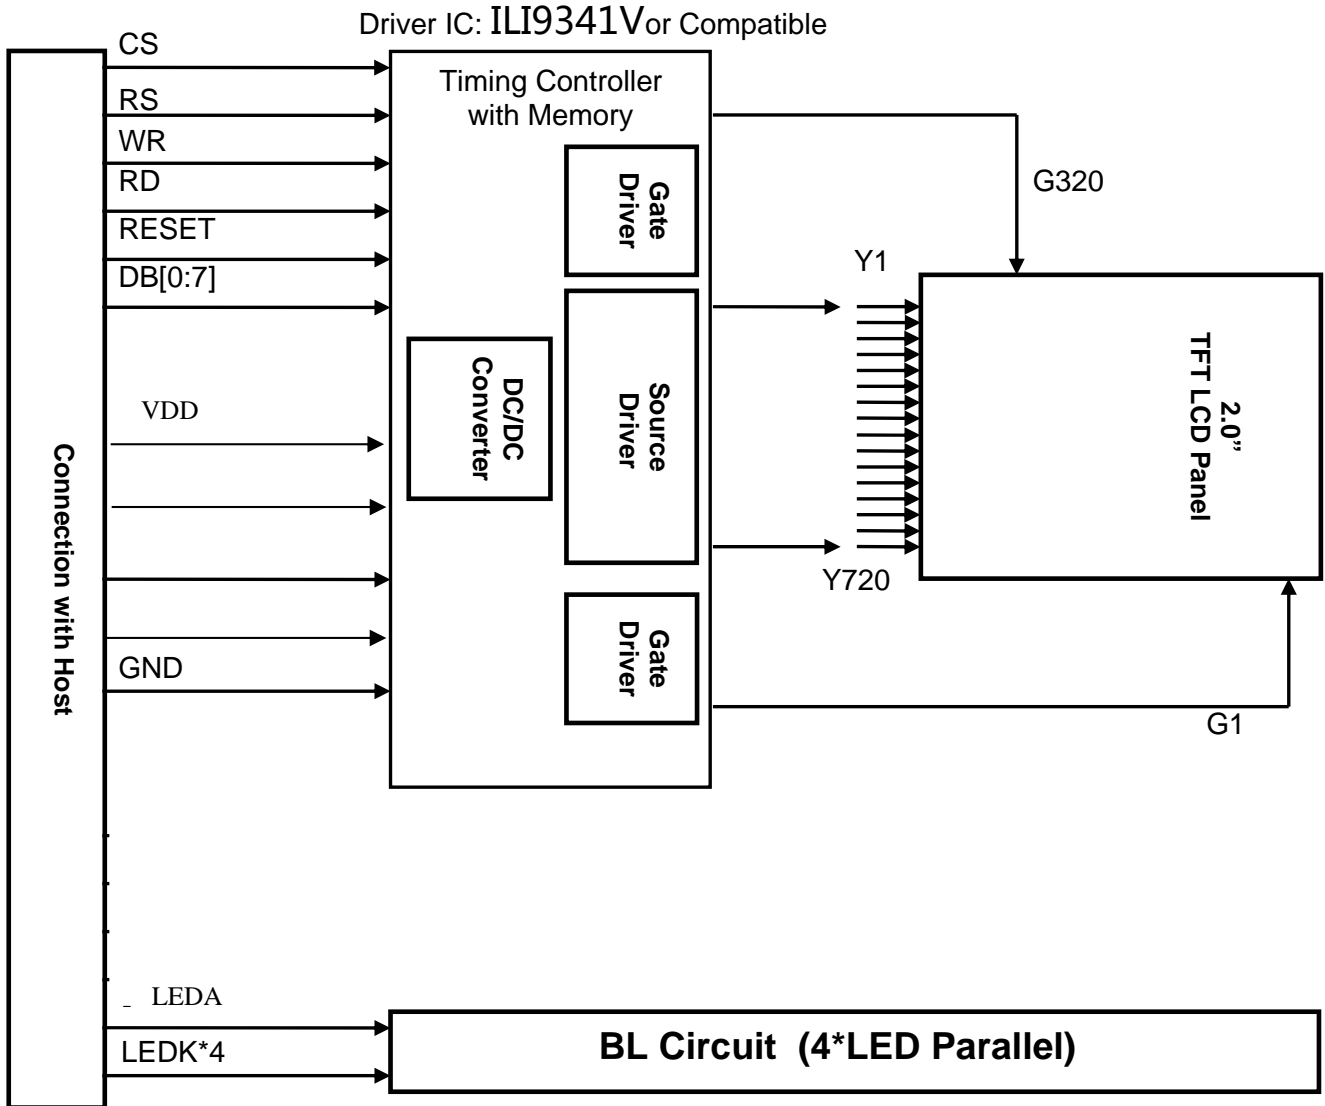

9. LCM Quality Criteria

9.1 VISUAL & FUNCTION INSPECTION STANDARD

9.1.1 Inspection conditions

Inspection performed under the following conditions is recommended.


Temperature : $25 \pm 5^{\circ}\text{C}$

Humidity : $65\% \pm 10\% \text{RH}$


Viewing Angle : Normal viewing Angle.

Illumination: Single fluorescent lamp (300 to 700Lux)

Viewing distance:30-50cm

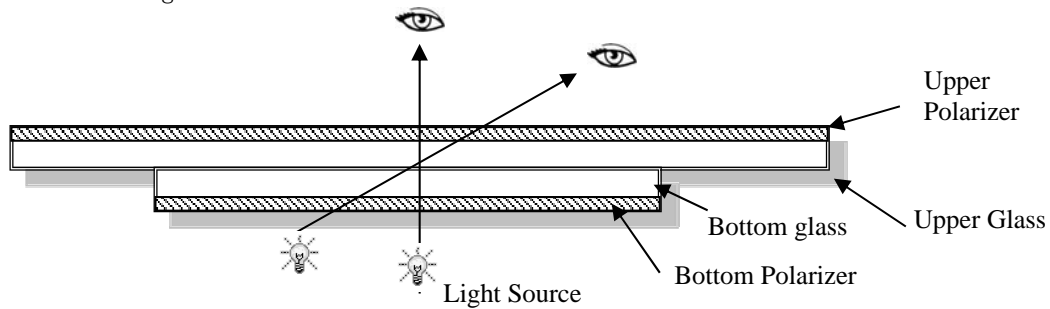

9.1.2 Definition

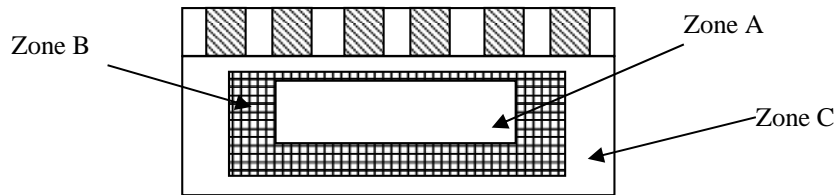

Zone A : Effective Viewing Area(Character or Digit can be seen)

Zone B : Viewing Area except Zone A

Zone C : Outside (Zone A+Zone B) which can not be seen after assembly by customer .)

Note:

As a general rule ,visual defects in Zone C can be ignored when it doesn' t effect product function or appearance after assembly by customer.

9.1.3 Sampling Plan

According to GB/T 2828-2003 ; , normal inspection, Class II




AQL:


Major defect	Minor defect
0.65	1.5

LCD: Liquid Crystal Display , TP: Touch Panel , LCM: Liquid Crystal Module




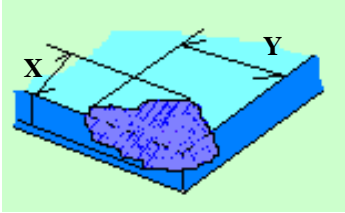
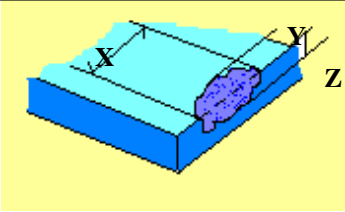
No	Items to be inspected	Criteria	Classification of defects
1	Functional defects	1) No display, Open or miss line 2) Display abnormally, Short 3) Backlight no lighting, abnormal lighting. 4) TP no function	Major
2	Missing	Missing component	
3	Outline dimension	Overall outline dimension beyond the drawing is not allowed	
4	Color tone	Color unevenness, refer to limited sample	Minor
5	Soldering appearance	Good soldering , Peeling off is not allowed.	
6	LCD/Polarizer/TP	Black/White spot/line, scratch, crack, etc.	

9.1.4 Criteria (Visual)

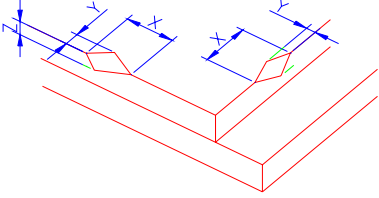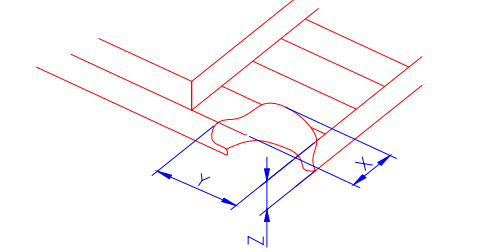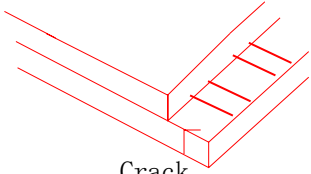Number	Items	Criteria(mm)						
<p>1.0 LCD Crack/Broken</p> <p>NOTE: X: Length Y: Width Z: Height L: Length of ITO, T: Height of LCD</p>	<p>(1) The edge of LCD broken</p>	 <table border="1" data-bbox="847 602 1391 759"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq 3.0\text{mm}$</td> <td><Inner border line of the seal</td> <td>$\leq T$</td> </tr> </tbody> </table>	X	Y	Z	$\leq 3.0\text{mm}$	<Inner border line of the seal	$\leq T$
X	Y	Z						
$\leq 3.0\text{mm}$	<Inner border line of the seal	$\leq T$						
	<p>(2) LCD corner broken</p>	 <table border="1" data-bbox="908 1084 1331 1162"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq 3.0\text{mm}$</td> <td>$\leq L$</td> <td>$\leq T$</td> </tr> </tbody> </table>	X	Y	Z	$\leq 3.0\text{mm}$	$\leq L$	$\leq T$
X	Y	Z						
$\leq 3.0\text{mm}$	$\leq L$	$\leq T$						
	<p>(3) LCD crack</p>	 <p>Crack Not allowed</p>						

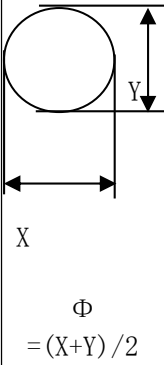Number	Items	Criteria (mm)			
2.0	Spot defect  <p style="text-align: center;">$\Phi = (X+Y)/2$</p>	① light dot (LCD/TP/Polarizer black/white spot , light dot, pinhole, dent, stain)			
		Zone Size (mm)	Acceptable Qty		
			A	B	C
		$\Phi \leq 0.10$	Ignore		Ignore
		$0.10 < \Phi \leq 0.15$	3(distance $\geq 10\text{mm}$)		
		$0.15 < \Phi \leq 0.2$	1		
		$0.2 < \Phi$	0		
		②Dim spot (LCD/TP/Polarizer dim dot, light leakage, dark spot)			
		Zone Size (mm)	Acceptable Qty		
			A	B	C
		$\Phi \leq 0.1$	Ignore		Ignore
		$0.1 < \Phi \leq 0.2$	2(distance $\geq 10\text{mm}$)		
		$0.2 < \Phi \leq 0.3$	1		
		$\Phi > 0.3$	0		
		③ Polarizer accidented spot			
		Zone Size (mm)	Acceptable Qty		
			A	B	C
		$\Phi \leq 0.2$	Ignore		Ignore
		$0.2 < \Phi \leq 0.5$	2(distance $\geq 10\text{mm}$)		
		$\Phi > 0.5$	0		

	Line defect (LCD/TP /Polarizer black/white line, scratch, stain)	<table border="1"> <thead> <tr> <th rowspan="2">Width (mm)</th> <th rowspan="2">Length (mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.03$</td> <td>Ignore</td> <td colspan="2">Ignore</td> <td rowspan="3">Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.05$</td> <td>$L \leq 3.0$</td> <td colspan="2">$N \leq 2$</td> </tr> <tr> <td>$0.05 < W \leq 0.08$</td> <td>$L \leq 2.0$</td> <td colspan="2">$N \leq 2$</td> </tr> <tr> <td>$0.08 < W$</td> <td colspan="4">Define as spot defect</td> </tr> </tbody> </table>				Width (mm)	Length (mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.03$	Ignore	Ignore		Ignore	$0.03 < W \leq 0.05$	$L \leq 3.0$	$N \leq 2$		$0.05 < W \leq 0.08$	$L \leq 2.0$	$N \leq 2$		$0.08 < W$	Define as spot defect			
Width (mm)	Length (mm)	Acceptable Qty																													
		A	B	C																											
$\Phi \leq 0.03$	Ignore	Ignore		Ignore																											
$0.03 < W \leq 0.05$	$L \leq 3.0$	$N \leq 2$																													
$0.05 < W \leq 0.08$	$L \leq 2.0$	$N \leq 2$																													
$0.08 < W$	Define as spot defect																														
3.0	Polarizer Bubble	<table border="1"> <thead> <tr> <th rowspan="2">Zone Size (mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.2$</td> <td colspan="2">Ignore</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$0.2 < \Phi \leq 0.4$</td> <td colspan="2">2 (distance $\geq 10\text{mm}$)</td> </tr> <tr> <td>$0.4 < \Phi \leq 0.6$</td> <td colspan="2">1</td> </tr> <tr> <td>$0.6 < \Phi$</td> <td colspan="2">0</td> </tr> </tbody> </table>				Zone Size (mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.2$	Ignore		Ignore	$0.2 < \Phi \leq 0.4$	2 (distance $\geq 10\text{mm}$)		$0.4 < \Phi \leq 0.6$	1		$0.6 < \Phi$	0							
Zone Size (mm)	Acceptable Qty																														
	A	B	C																												
$\Phi \leq 0.2$	Ignore		Ignore																												
$0.2 < \Phi \leq 0.4$	2 (distance $\geq 10\text{mm}$)																														
$0.4 < \Phi \leq 0.6$	1																														
$0.6 < \Phi$	0																														
4.0	SMT	According to IPC-A-610C class II standard . Function defect and missing part are major defect , the others are minor defect.																													
		TP bubble/accident spot	<table border="1"> <thead> <tr> <th rowspan="2">Size Φ (mm)</th> <th colspan="3">Acceptable Qty</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.1$</td> <td colspan="2">Ignore</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$0.1 < \Phi \leq 0.2$</td> <td colspan="2">2 (distance \geq)</td> </tr> <tr> <td>$0.2 < \Phi \leq 0.3$</td> <td colspan="2">1</td> </tr> <tr> <td>$0.3 < \Phi$</td> <td colspan="2">0</td> </tr> </tbody> </table>			Size Φ (mm)	Acceptable Qty			A	B	C	$\Phi \leq 0.1$	Ignore		Ignore	$0.1 < \Phi \leq 0.2$	2 (distance \geq)		$0.2 < \Phi \leq 0.3$	1		$0.3 < \Phi$	0							
Size Φ (mm)	Acceptable Qty																														
	A	B	C																												
$\Phi \leq 0.1$	Ignore		Ignore																												
$0.1 < \Phi \leq 0.2$	2 (distance \geq)																														
$0.2 < \Phi \leq 0.3$	1																														
$0.3 < \Phi$	0																														
	Assembly deflection	beyond the edge of backlight $\leq 0.15\text{mm}$																													

5.0	TP Related	Newton Ring	Newton Ring area > 1/3 TP area NG	 <p>1 规律性</p>  <p>2 非规律性</p>  <p>似牛顿环</p>	Newton Ring area ≤ 1/3 TP area OK							
			TP corner broken X: length Y: width Z: height		<table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>X ≤ 3.0mm</td> <td>Y ≤ 3.0mm</td> <td>Z < LCD thickness</td> </tr> </table> <p>* Circuitry broken is not allowed.</p>	X	Y	Z	X ≤ 3.0mm	Y ≤ 3.0mm	Z < LCD thickness	
			X		Y	Z						
X ≤ 3.0mm	Y ≤ 3.0mm	Z < LCD thickness										
TP edge broken X: length Y: width Z: height	<table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>X ≤ 6.0mm</td> <td>Y ≤ 2.0mm</td> <td>Z < LCD thickness</td> </tr> </table> <p>* Circuitry broken is not allowed.</p>	X	Y	Z	X ≤ 6.0mm	Y ≤ 2.0mm	Z < LCD thickness					
X	Y	Z										
X ≤ 6.0mm	Y ≤ 2.0mm	Z < LCD thickness										

Criteria (functional items)

Number	Items	Criteria (mm)
1	No display	Not allowed
2	Missing segment	Not allowed
3	Short	Not allowed
4	Backlight no lighting	Not allowed
5	TP no function	Not allowed

9.2 RELIABILITY TEST

NO	ITEM	CONDITTON	STANDARD
1	High Temp. Storage	80°C, 120 hours	1. Functional test is OK. Missing Segment, short, unclear segment, non-display, display abnormally and liquid crystal leak are un-allowed. 2. No low temperature bubbles, end seal loose and fall, frame rainbow. 1. Function test is OK. 2. No glass crack, chipped glass, end seal loose and fall, epoxy frame crack and so on. 3. No structure loose and fall.
2	Low Temp. Storage	-30°C, 120 hours	
3	High Temp. Operation	70°C, 120 hours	
4	Low Temp. Operation	-20°C, 120 hours	
5	High temperature and high Humidity storage	40°C, 90%RH , 120 hours	
6	Thermal and cold shock	Static state, -20°C (30 Min) ~70°C (30 Min) ~ -20°C (30Min) , packaging, 10 cycles	
7	Vibration test	Packaging, Frequency : 10-55Hz Amplitude : 1.0mm, Each direction on X,Y axe 0.5 hours, circle 2 hours	
8	Dropping test	Pack products into the carton box. Drop it from 80cm height to ground. Once for each side of the carton	

NOTE:

9.2.1 The reliability items will be fully performed in new sample qualification,

9.2.2 The reliability status will be tested as monitor during mass production. Individual reliability test shall be

performed by lot , Moreover, the individual reliability item shall be decided according to reliability plan.

9.2.3 All samples are inspected after keeping in the room with normal temperature and humidity for 2 hours or above.

9.2.4 Vibration test: It is not necessary to test for those products without assembly frame , back light ,PCB and so on.

9.2.5 Dropping test : It is necessary for affirming new package.

9.2.6 For the high temperature and high humidity test, pure water of over 10 MΩ.cm should be used.

9.2.7 Each test item applies for test LCM only once .Then tested LCM cannot be used again in any other test item.

9.2.8 The quantity of LCM examination for each test item is 5pcs to 10pcs.

9.3 Safetv instructions

9.3.1 If the LCD panel breaks, be careful not to get any liquid crystal substance in your mouth.

9.3.2 If the liquid crystal substance touches your skin or clothes, please wash it off immediately by using soap and water.

9.4 Handling Precautions

9.4.1 Avoid static electricity damaging the LSI.

9.4.2 Do not remove the panel or frame from the module .

9.4.3 The polarizing plate of the display is very fragile . So, please handle it very carefully.

9.4.4 Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of the plate.

9.4.5 The color tone of display and background of LCM has the possibility to be changed in the storage temperature range.

9.4.6 Pay attention to the working environment, as the element may be destroyed by static electricity.

--Be sure to ground human body and electric appliance during work.

--Avoid working in a dry environment to minimize the generations of static electricity.

--Static electricity may be generated when the protective film is fast peeled off.

9.4.7 When soldering the terminal of LCM, make certain the AC power source of soldering iron does not leak.

10.4.8 If the display surface becomes contaminated ,breathe on the surface and gently wipe it with a soft-dry- clean cloth .If it is heavily contaminated ,moisten cloth with the following solvent(ex:Ethyl alcohol).Solvents other than those above-mentioned may damage the polarizer(Especially ,do not use them .ex: Warter / Ketone)

9.5 Operation instructions

9.5.1 It is recommended to drive the LCD within the specified voltage limits, try to adjust the operating voltage for the optimal contrast, the color and contrast of LCD panel will varies at different temperature.

9.5.2 Response time is greatly delayed at low operating temperature range. However, this does not mean the LCD will be out of the order, It will recover when it returns to the specified temperature range.

9.5.3 If the display area is pushed hard during operation, the display will become abnormal.

9.5.4 Do not operate the LCD at the environments over the specified conditions, this may cause damage on the LCD and shorten the lifetime.

9.6 Storage instructions:

9.6.1 Store LCDs in a sealed polyethylene bag.

9.6.2 Store LCDs in a dark place, Do not expose to sunlight or fluorescent light. Keep the temperature between 0°Cand 35°C.

9.6.3 Avoid the polarizer touch any other object, (It is recommended to store them in the container in which they were shipped.)

9.7 Limited Warranty

9.7.1 will replace or repair any of its LCD modules, which are found to be defective, when inspected in accordance with LCM acceptance standards (copies available upon request) for a period of 12 months from ink- print date on product

9.7.2 Any defects must be returned to within 60 days since ship-out. Confirmation of such date shall be based on freight documents. The warranty liability of wasam limited to repair and/or replacement on defects above (7.1,7.2)

9.7.3 No warranty can be granted if the precautions stated above have been disregarded. The typical samples are as below:

- LCD glass crack/break
- PCB outlet is damaged or modified.
- PCB conductors damaged.
- Circuit modified with by grinding, engraving or painting varnish.
- FPC crack

9.7.4 Modules must be returned with sufficient description of the failures of defects. Any connectors or cable installed by the customer must be removed completely without damaging the PCB outlet, conductors and terminals. Modules must be packed with the container in which they were shipped.



10. Packing method

PARAMETER	Specification	Unit
Outside box	390(L) x 350(W) x 480(H)	mm
Inside pearl wool box	330(L)x185(W)x110(H)	mm
Product quantity of Inside box	64	pcs
Total product quantity	64*8=512	pcs
Total weight	11 ±0.5	Kg

