



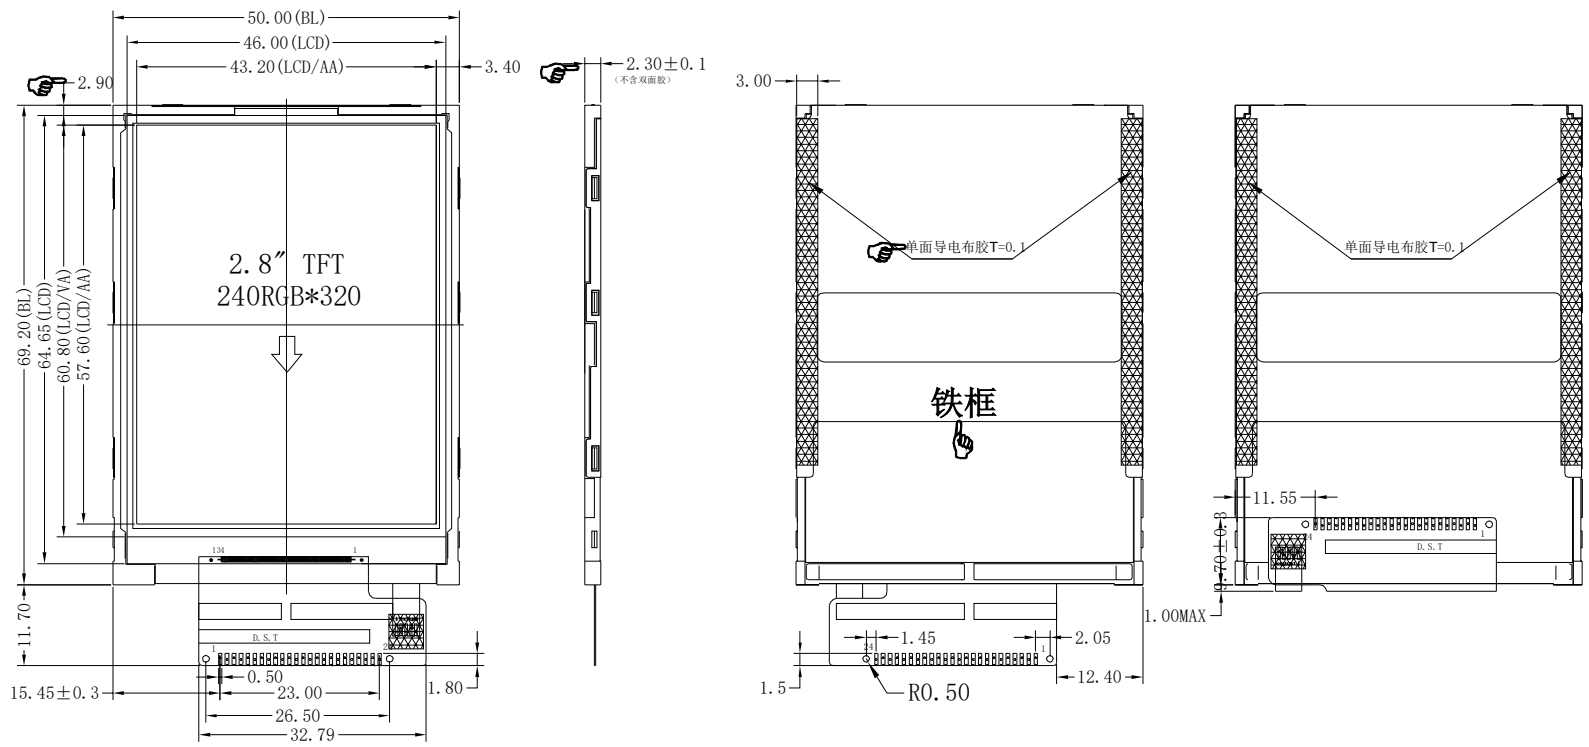

注：标注  请重点确认



PIN	DESCRIPTION
1	BL K
2	BL A
3	GND
4	VDD (2.8V)
5	IOVCC (2.8V)
6	FMARK
7	/CS
8	/RSTB
9	RS
10	WRB
11	RDB
12	DB7
13	DB6
14	DB5
15	DB4
16	DB3
17	DB2
18	DB1
19	DB0
20	GND
21	NC
22	NC
23	NC
24	NC

LCD Type	2.8" TFT, Transmissive, Normally white, TN
Resolution	240(RGB)*320
View Direction	6 O'CLOCK
Driver IC	ST7789V
Color Depth	262K
Interface Types	MCU8-bit
Operating voltage	2.8V
TP/Lens	Without
Backlight LEDs	4 LEDs, 60mA, 3.2V
Surface luminance	250cd/m2
Operating temperature	-20 °C ~ 70 °C
Storage Temperature	-30 °C ~ 80 °C
Storage Humidity	60°C 90% max



"  " Need to pay attention to		the key size with *		 东莞市一众显示科技有限公司 DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.			
版本 (Version)	变更记录 (Change History)	日期 (Date)	视角 (View):	比例 (Proportion): 1 : 1	设计 (DESIGN)	审核 (AUDITING)	批准 (APPROVED)
V1			单位 (Unit):	MM	页面 (Page):	1 / 1	
V2			产品型号 (Product Type):	TST028QVVS-08		Jacky	Aron
			图纸版本 (Version):	V1		2018. 5. 17	2018. 5. 17