



REV.	CHANGE CONTENT	BY	DATE

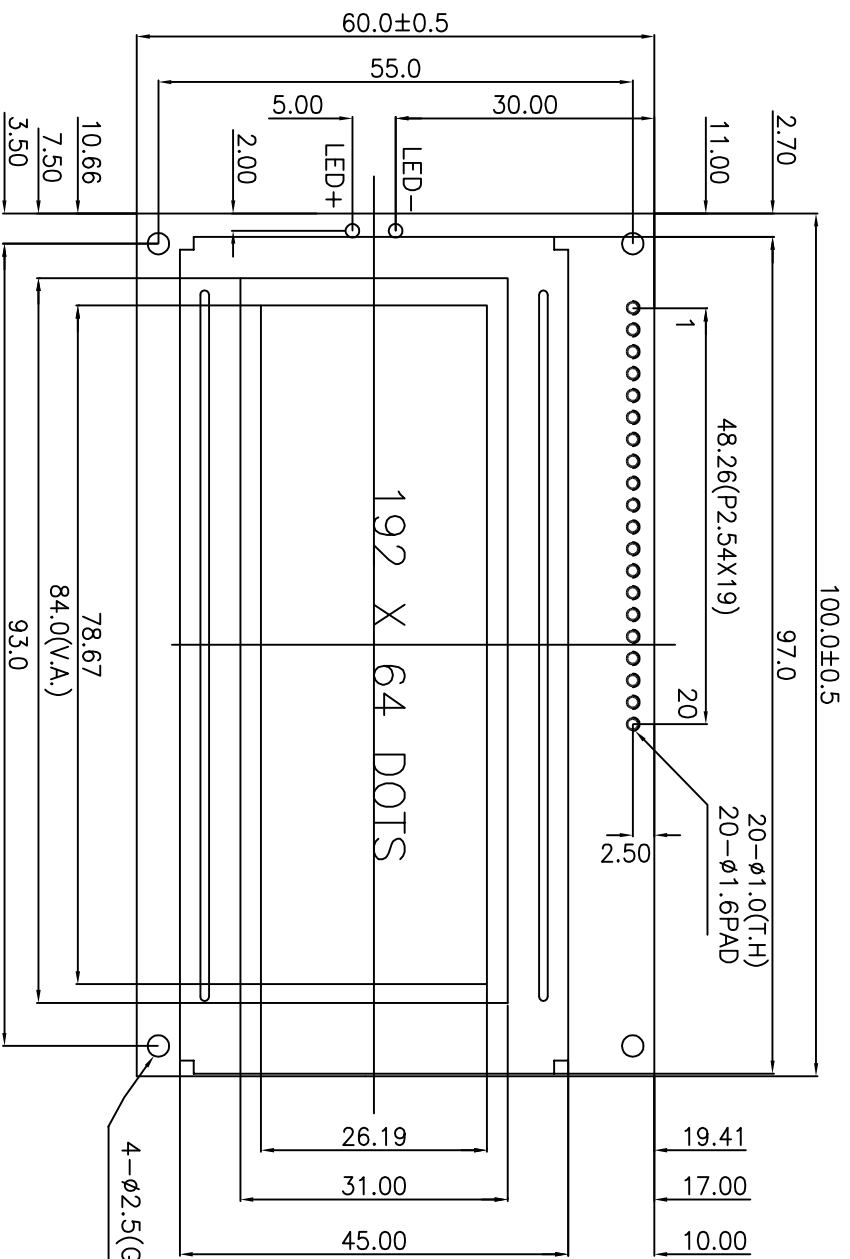

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	E	R/W	RS	VO	VDD	VSS	CSB	CSA	VEE	RST	SLA	SLK	

NOTE:

DISPLAY TYPE : STN TRANSLLECTIVE-POSITIVE-Y/G
VIEWING DIRECTION : 6: 00
OPERATING VOLT. : VOP=12.0V
OPERATING TEMP. : -20°C ~ +70°C
STORAGE TEMP. : -30°C ~ +80°C
DRIVE METHOD : 1/64 DUTY 1/9 BIAS VDD:5.0V
LED : COLOR:YELLOW-GREEN 5.0V,180mA
DRIVE IC : S6B0107,S6B0108*3

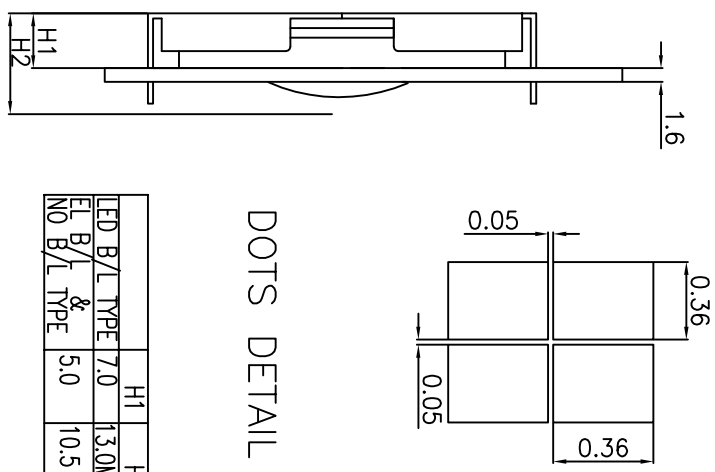

DOTS DETAIL

LED B/L TYPE	H1	H2
7.0	13.0Max.	10.5 Max.
EL B/L & NO B/L TYPE	5.0	10.5 Max.

CSA	CSB	SELECTION
0	0	IC1
0	1	IC2
1	0	IC3
1	1	NONE

TOLERANCE
>0~6 ±0.10
>6~80 ±0.20
>80~240 ±0.30
>240~400 ±0.50
// 1.0 ±0.10

TSP 东莞市一众显示科技有限公司
DONG GUAN TEAM SOURCE DISPLAY TECH. CO. LTD.

DRAWING No. :	TSM19264-1
DRAWING TITLE:	LCD MODULE
REV. :	SCALE : -
PROJECTION:	UNIT : MM
	SHEET : 1/1

1 2 3 4 5 6 7 8