
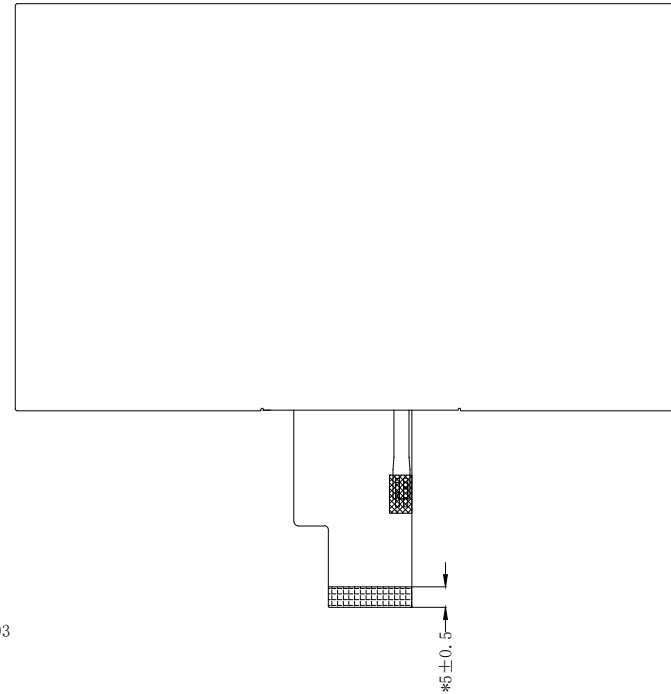
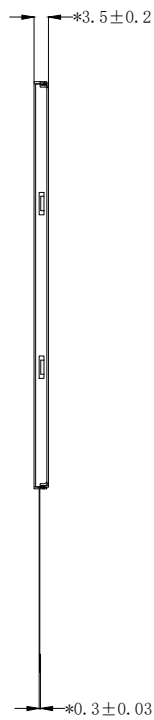


Front view

Side view

Back view


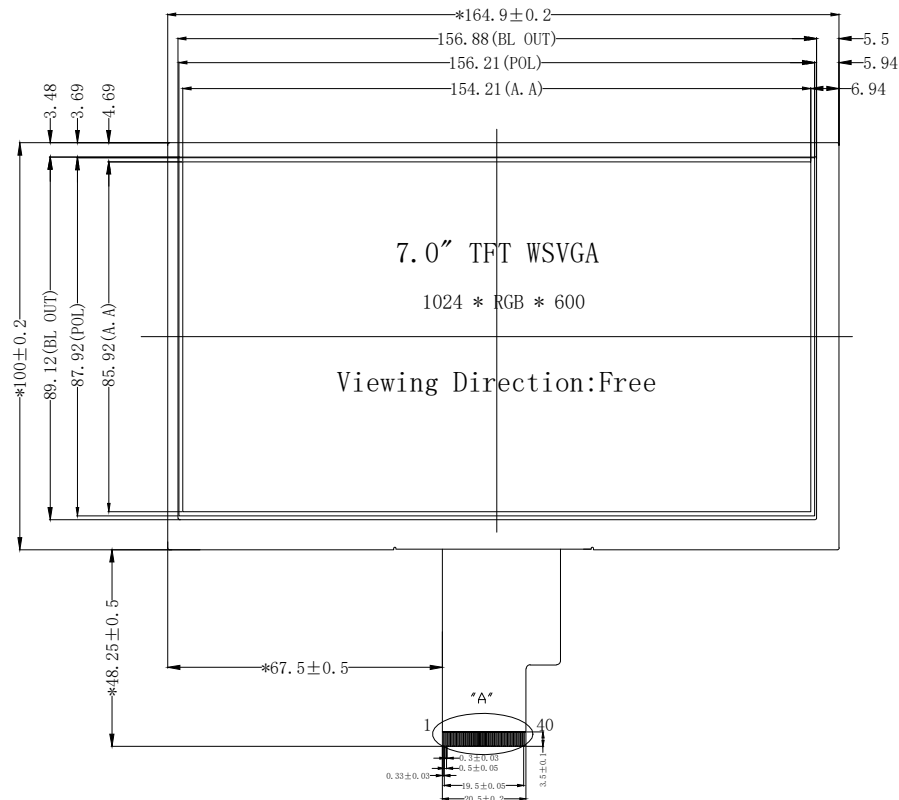


PIN:	SYMBLE
1	VCOM
2	VDD
3	VDD
4	NC
5	Reset
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIMO
28	SELB
29	AVDD
30	GND
31	LED-
32	LED-
33	L/R
34	U/D
35	VGL
36	CABCEN1
37	CABCEN0
38	VGH
39	LED+
40	LED+

GENERAL TOLERANCE: ±0.2

LCD Type	7.0" TFT, Transmissive, Normally black, IPS
Resolution	1024(RGB)*600
View Direction	all O'CLOCK
LCD Driver IC	EK79001+EK73215
Color Depth	16.7M
Interface Types	LVDS
Operating voltage	DVDD=3.3V
TP/ LENS	Without
Backlight LEDs	27 LEDs, 180mA, 9.3V
Surface luminance	350 cd/m2
Operating temperature	-20 °C ~ 70 °C
Storage Temperature	-30 °C ~ 80 °C
High Temp&High Humidity	60°C 90% max

上偏光片: 0.13mm砂片
下偏光片: 0.17mm增亮片

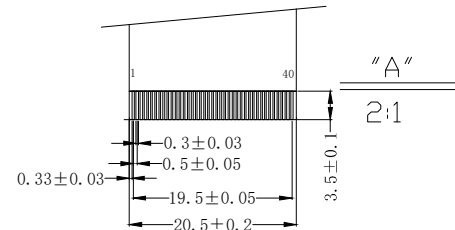

External power supply:
DVDD = 3.3 V
AVDD = 9.6 V
VGH = 18 V
VGL = -6 V
VCOM: 3.7V~4.1V

" " Need to pay attention to		the key size with *		东莞市一众显示科技有限公司 DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.							
版本 (Version)	变更记录 (Change History)	日期 (Date)	视角 (View):	比例 (Proportion):	1 : 1	设计 (DESIGN)	审核 (AUDITING)	批准 (APPROVED)			
V1			单位 (Unit):	M M	1 / 1	Aron	Penix				
V2			产品型号 (Product Type):	TST070XVZH-05		2017.11.30	2017.11.30				