



Front View

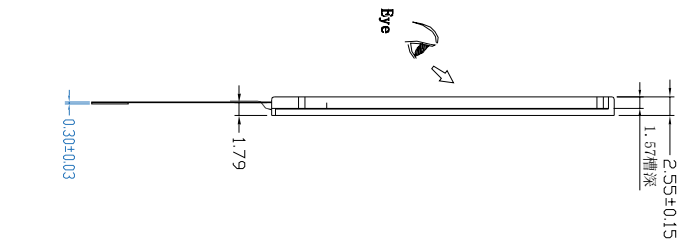

Side View

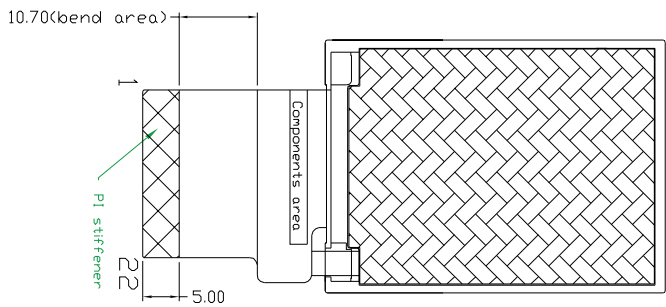


Back View

LCM pin	
1	VDD
2	ID0<VDD>
3	ID1<VDD>
4	ID2<GND>
5	ID3<GND>
6	GND
7	CS
8	A0
9	RD
10	WR
11	RESET
12	DB0
13	DB1
14	DB2
15	DB3
16	DB4
17	DB5
18	DB6
19	DB7
20	BL_A
21	BL_K
22	NC

NOTES:
General Tolerance: ±0.2

LCD Type	1.77" TFT Transmissive, Normally white TN
LCD Resolution	128*(RGB)*160
View* Direction	6 O'CLOCK
Driver IC	ST7735S
Color Depth	16.7M
Interface Types	MCU8-bit
Operating voltage	VDD=2.8V~3.3V
TP/Lens	Without
Backlight LEDs	2 LEDs, 40mA, 3.2V
Operating temperature	-20 °C~70 °C
Storage Temperature	-30 °C~80 °C



"Need to pay attention to"

the key size with *

版本 (Version)	变更记录 (Change History)	日期 (Date)	视角 (View):	比例 (Proportion):	1 : 1	设计 (DESIGN)	审核 (AUDITING)	批准 (APPROVED)
V1			单位 (Unit):	M M	1 / 1			
V2			产品型号 (Product Type):	TST018QAST-05				
V3			版本 (Version):	V2				



东莞市一众显示科技有限公司
DONG GUAN TEAM SOURCE DISPLAY TECH. CO. LTD.