
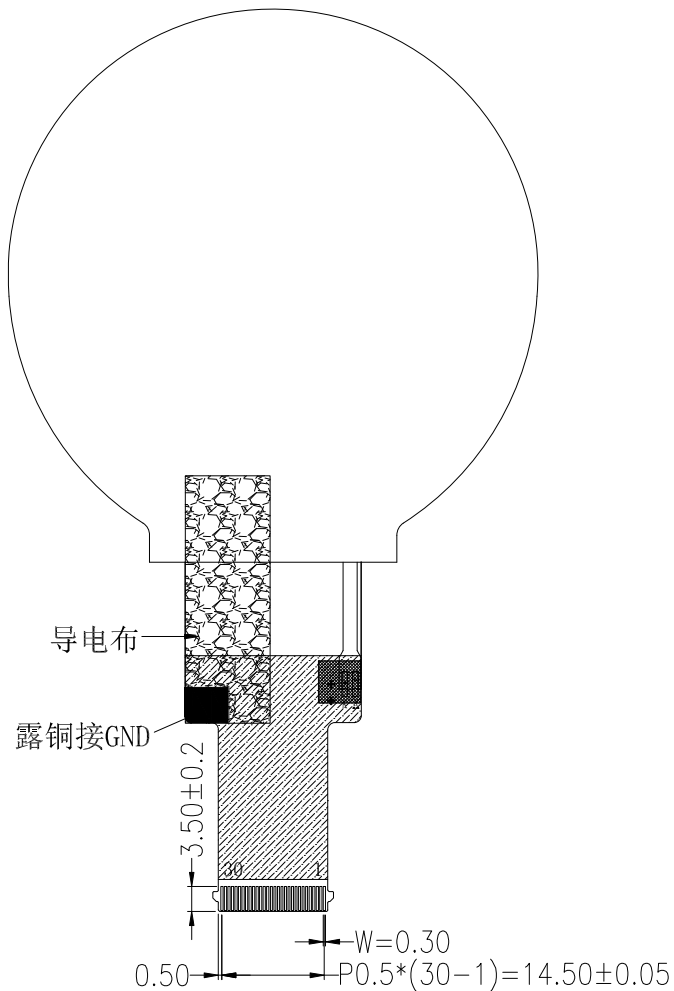
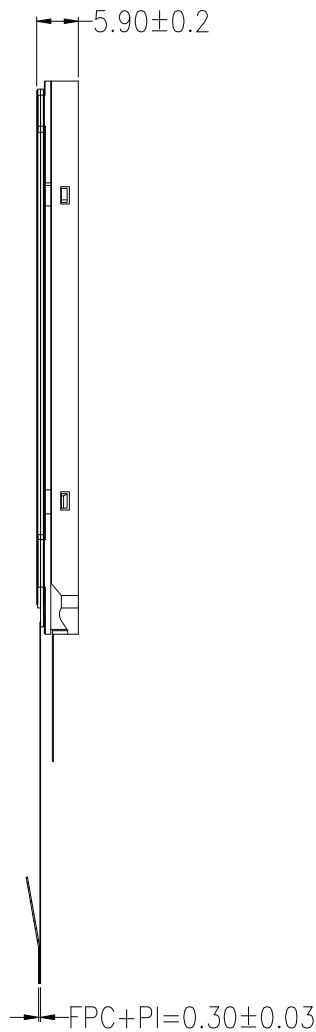



Part drawing & Spec.revision record during discussio with vendor		
Rec.	Revision content description	Date
#1	FIRST ISSUE	2024-07-04

请在申请样品时回签此页图纸			
客户确认签名:			

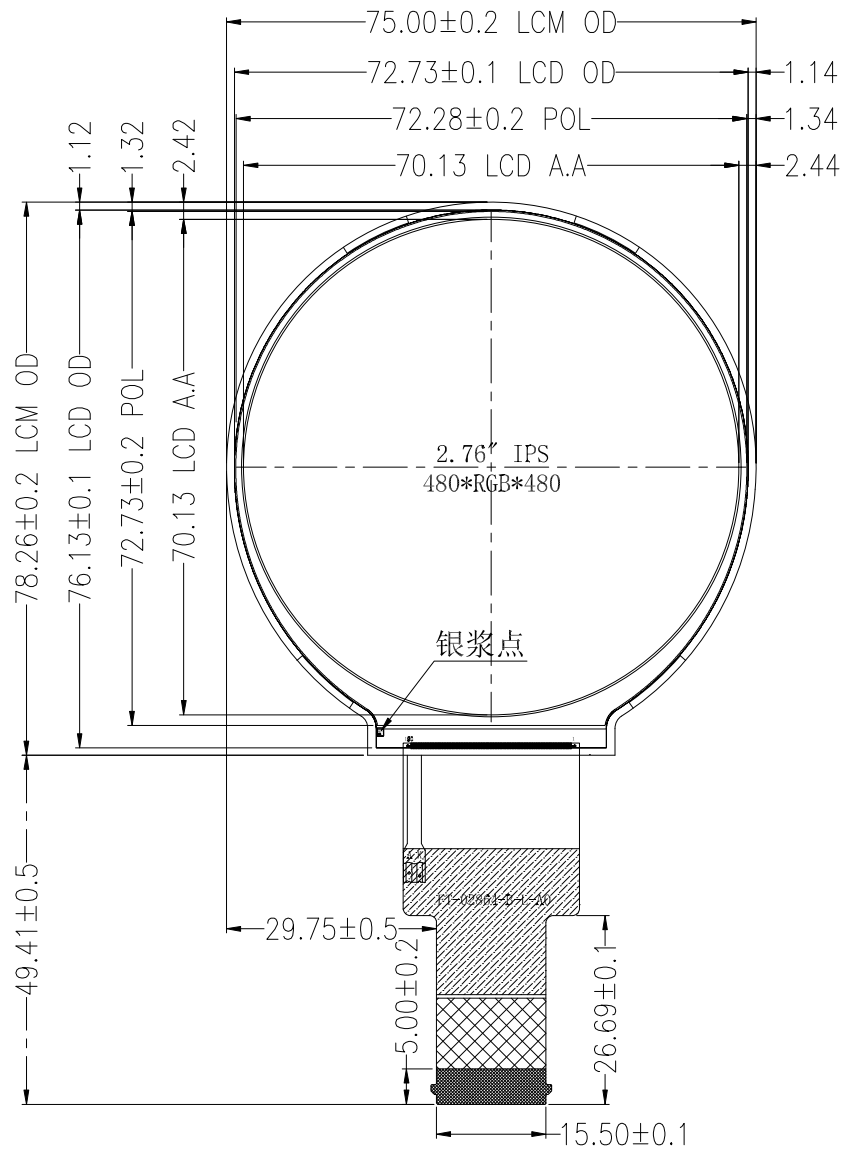

PIN	DESC	PIN	DESC
1	LEDA	16	CLKP
2	LEDK	17	CLKN
3	LEDK	18	GND
4	VCC	19	NC
5	IOVCC	20	NC
6	RESET	21	GND
7	TE	22	ID0
8	PWM	23	ID1
9	GND	24	GND
10	D0P	25	NC
11	D0N	26	NC
12	GND	27	NC
13	D1P	28	NC
14	D1N	29	NC
15	GND	30	NC

- NOTES:
- DISPLAY TYPE:2.8", TFT;
 - VIEWING DIRECTION :ALL;
 - Driver IC:ST7701SI;
 - STORAGE TEMPERATURE:-30° C TO 85° C,
OPERATING TEMPERATURE:-30° C TO 85° C;
 - BAKE LIGHT:6 LED, If=80mA/LED, 18V
 - Brightness:1000CD/M²; Unifomity >80%;
 - GENERAL TOLERANCE:±0.2mm;
 - RoHS REACH;
 - 平面翘曲度公差: ≤0.3MM;

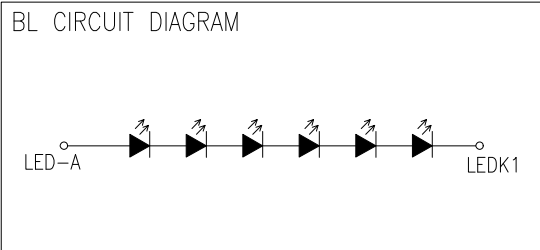

展开出货

				Part NO.	TST028WVBS-S64			SHEET	1
								OF	1
DESIGNED				CHECKED		APPROVED		FILE NAME	
				LJ				Count Dwg.	
mm				2024-07-04					
A4				N-T-S					
SCALE									