


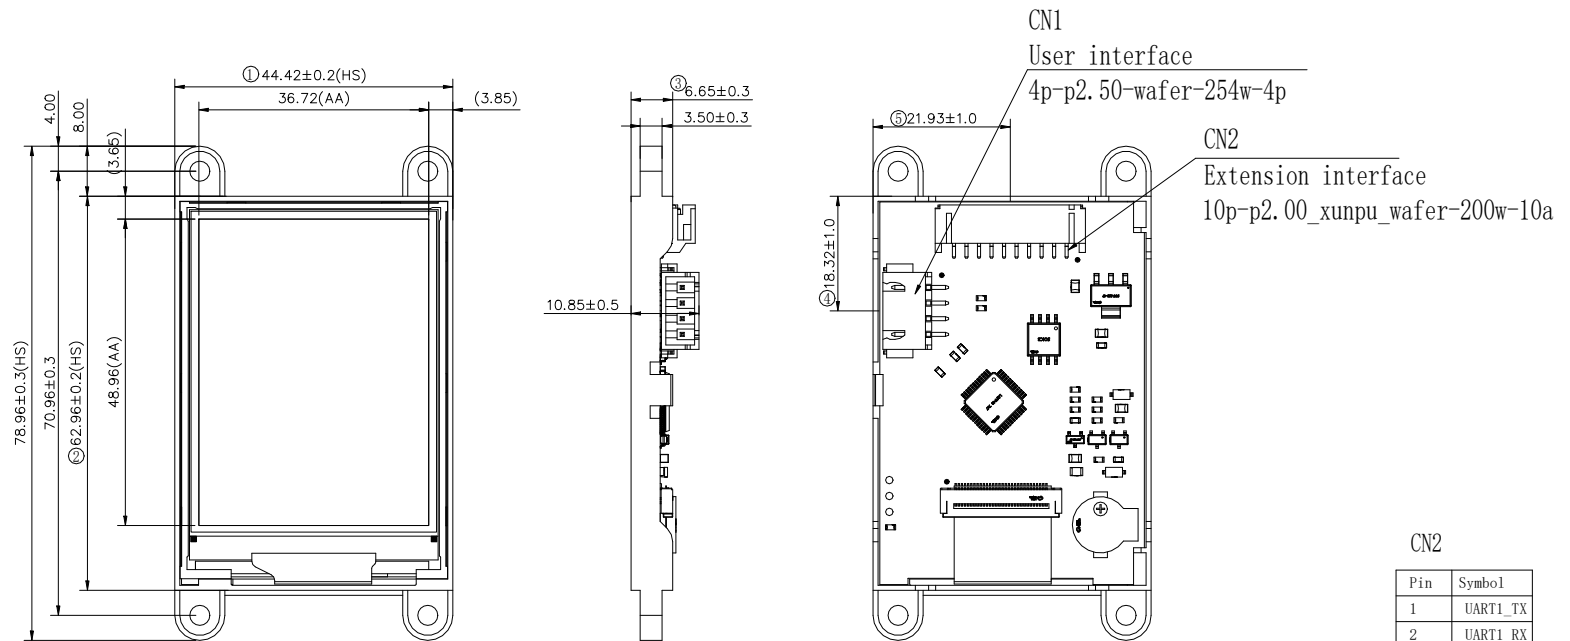

NOTES:

1. GENERAL TOLERANCE: ± 0.2
2. () REFERENCE DIMENSION
3. Important dimension: ①~⑤

LED Type	240°TFT, Transmissive
Resolution	Normally black IPS
View Direction	240(RGB)*320
Color depth	All o'clock
Pixel Arrangement	16.7M
Surface luminance	RGB-stripe
MO	300d/m(typ)
User's Interface	STM32G070CBT6
Backlight TP or Lens	UART
Operating temperature	Without
Storage temperature	-20°C~70°C
	-30°C~80°C

版本 (Version)	变更记录 (Revise History)	日期 (Date)	设计 (DESIGN)	San
A0	Initial release	2024.08.27	审核 (CHECKED)	Aron
			批准 (APPROVED)	Aron
			客户承认 (CUSTOMER APPROVAL)	

TSD 一眾显示		
TITLE:	页面 (Page)	1 / 1
LCM+PCBA+HS	单位 (Unit)	mm
Drawing No.	比例 (SCALE)	1 : 1
Gen4-STM32-24NT-01	角度 (Angle)	