


REV.	CHANGE CONTENT	BY	DATE

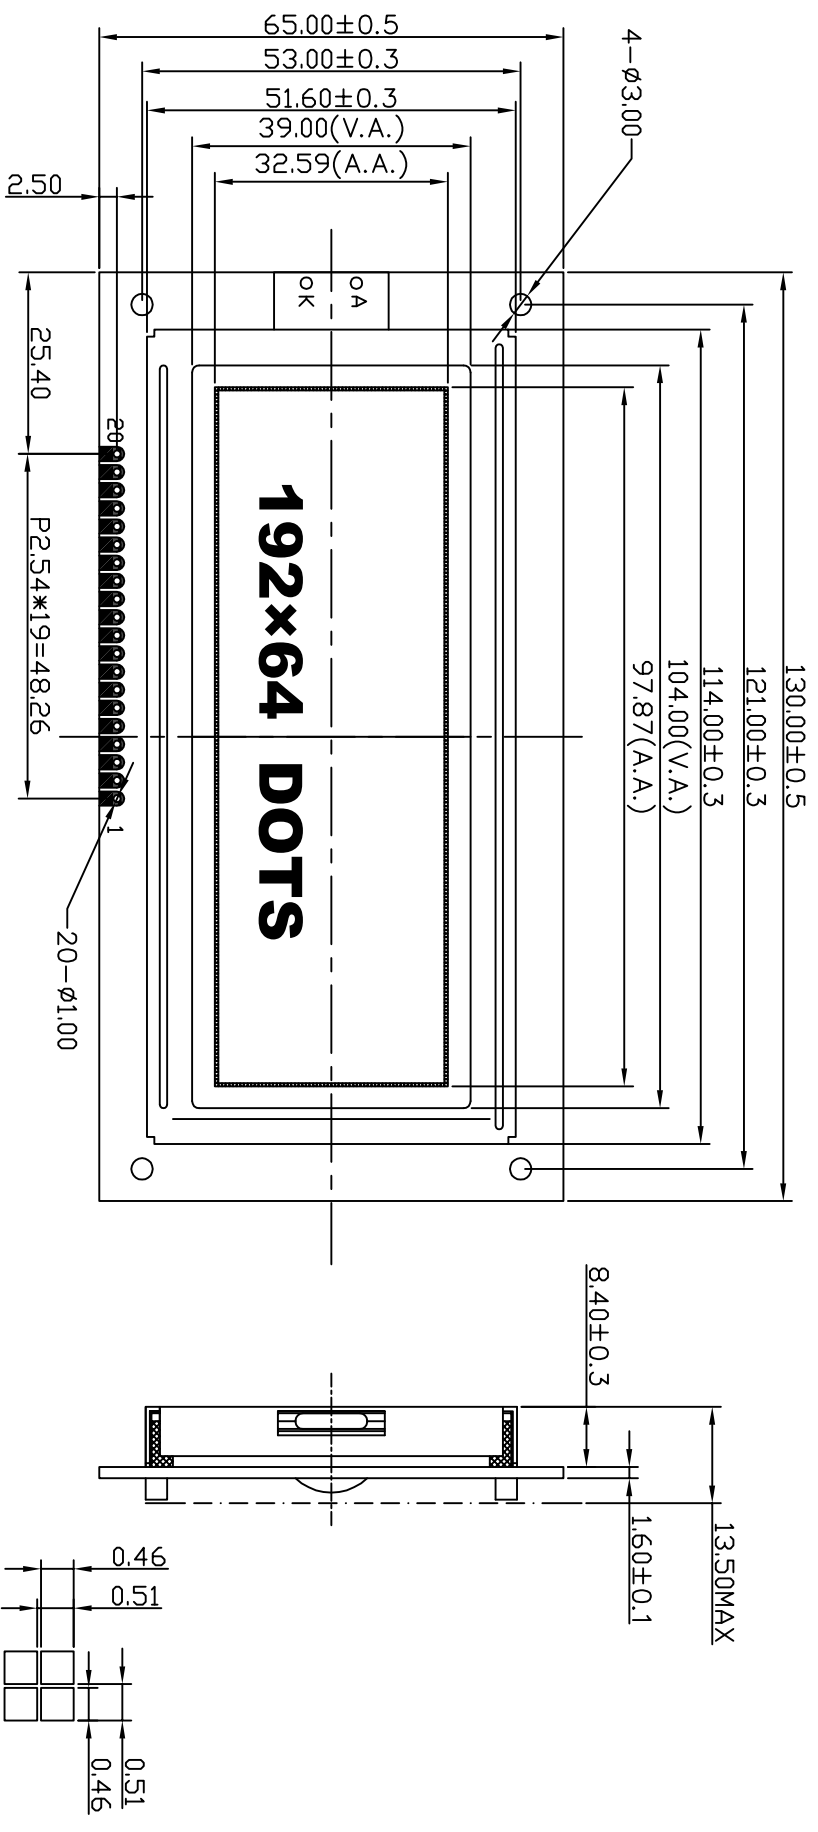

Pin No.	1	2	3	4	5	6	7-14	15	16	17	18	19	20
Symbol	Vss	Vdd	VO	RS	R/W	E	DB0-DB5	RS1	RS2	RS3	RS4	RS5	LED

NOTE:

1. STN, Y/G, POSITIVE, TRANSPARENT
2. 1/64 DUTY, 1/9 BIAS, VOP: 12.7V, VDD: 5.0V
3. VIEWING DIRECTION: 6:00
4. OP. TEMP: -20°C ~ +70°C
5. ST. TEMP: -30°C ~ +80°C
6. DRIVER IC: S6B0108/S6B0107
7. LED: Y/G 240mA, 5V

TOLERANCE		DESIGN		STANDARD		DRAWING No. :	
>0~6	±0.10	CHECKED	JHG	TECHNOLOGY			TSM19264-3
>6~80	±0.20	DESIGN	JHG	QA			DRAWING TITLE: LCM DRAWING
>80~240	±0.30	CHECKED	JHG				FILE NO.: 8
>240~400	±0.50	APPROVED	JHG				REV. : A
// 1.0	±0.10						PROJECTION: 1st Angle
							SCALE : -
							UNIT : mm
							SHEET : 1/1

ISIP 东莞市一众显示科技有限公司
DONG GUAN TEAM SOURCE DISPLAY TECH. CO., LTD.