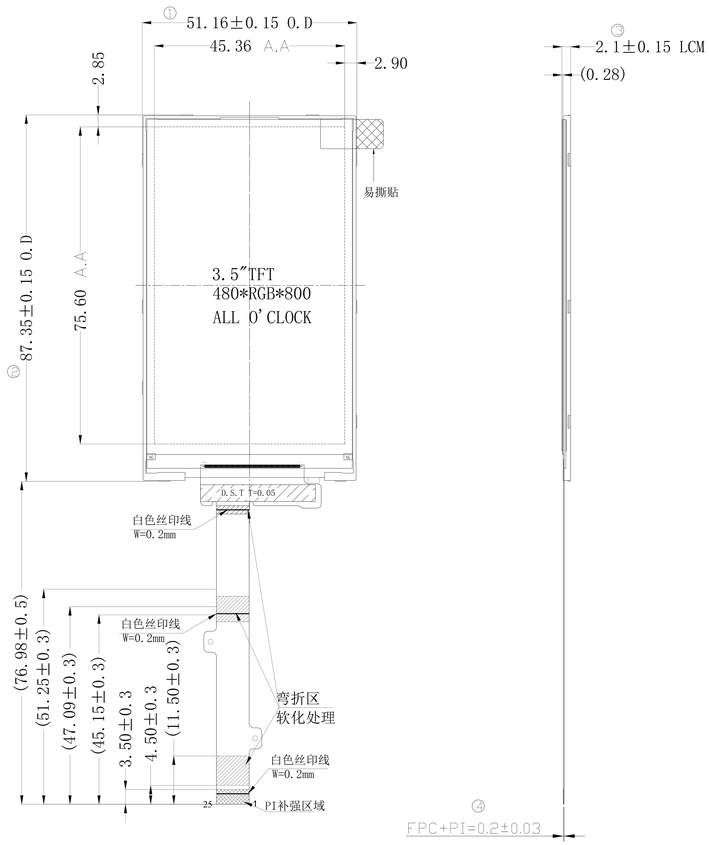

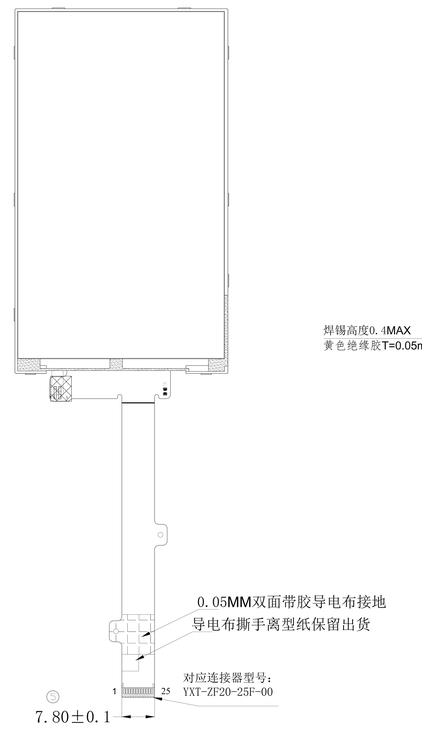

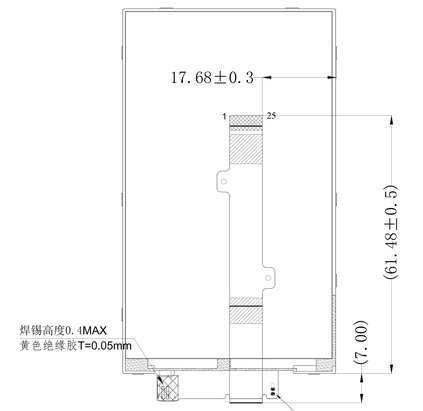

FPC弯折示意
FPC展开出货

PIN	Descriptio
1	LED+
2	LED-
3	GND
4	NC
5	NC
6	GND
7	TDP0
8	TDN0
9	GND
10	TCP
11	TCN
12	GND
13	TDP1
14	TDN1
15	GND
16	NC
17	NC
18	GND
19	LCD_RST
20	LCD_TE
21	ID(10K GND)
22	VDD2.8V
23	GND
24	VIO1.8V
25	GND

NOTES:
1. GENERAL TOLERANCE:±0.2
2. ( )REFERENCE DIMENSION
3. Important dimension: ① ~ ⑤



LED CIRCUIT DIAGRAM:

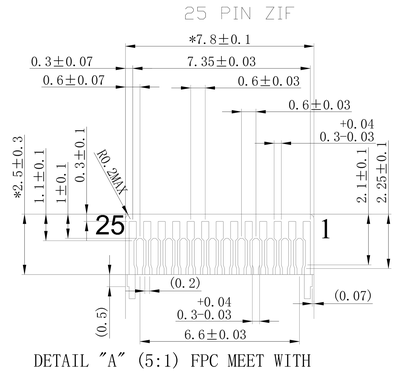

DETAIL "A" (5:1) FPC MEET WITH
CONNECTOR:YXT-ZF20-25F-00



LCD Type	3.5"TFT,Transmissive Normally black,IPS
Resolution	480(RGB)*800
View Direction	All O'CLOCK
LCD Driver IC	ST7701S
Color Depth	16.7M
Interface Types	MIPI
Operating voltage	2.8V
TP/Lens	Without
Backlight LEDs	7 LEDs，20mA,22.4V
Surface luminance	420 cd/m2
Operating temperature	-10 ℃~60 ℃
Storage temperature	-20 ℃~70 ℃

版本 (Version)	变更记录(Change History)	日期(Date)
A0	Initial release	2020.03.25

设计(DESIGN)	Bill	TITLE: MODULE SPEC	页面(Page) 1 / 1
审核(CHECKED)	Aron		单位(Unit) mm
批准(APPROVED)	Aron	Drawing No. TST035WVBS-66	比例(SCALE) 1 : 1
客户承认 (CUSTOMER APPROVAL)			角度(Angle)

TSD™ 一众显示 TEAM SOURCE DISPLAY