

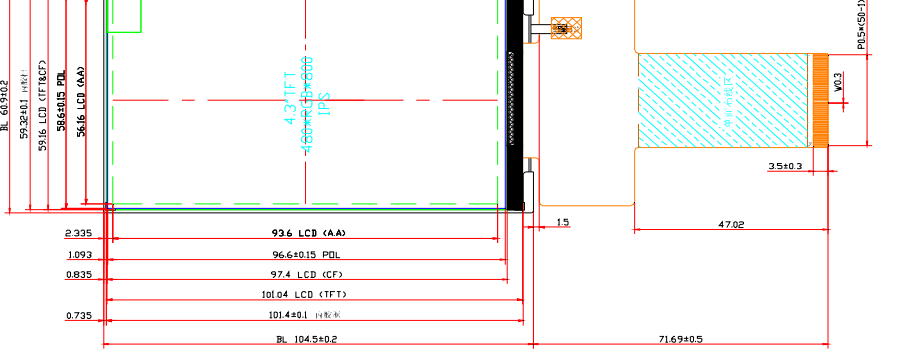
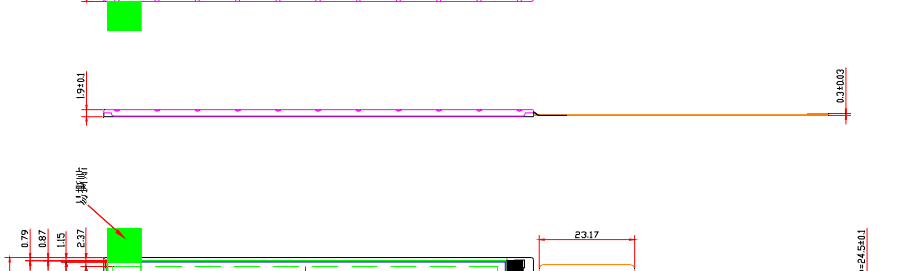
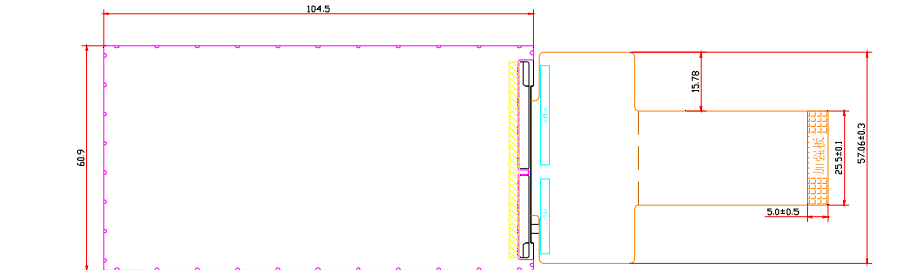


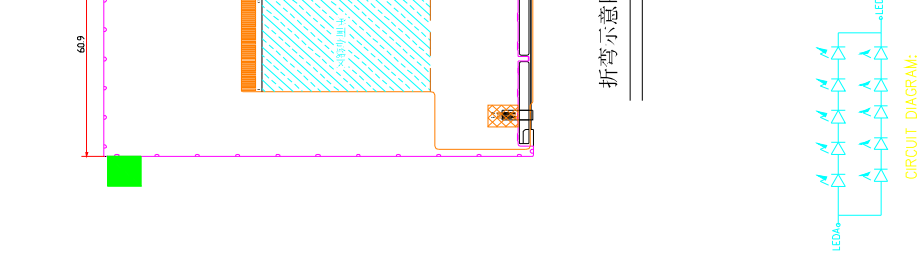

PIN LIST	
1	LEDK
2	LEDA
3	NC
4	GND
5	GND
6	VCI
7	VCI
8	BS0
9	BS1
10	BS2
11	BS3
12	RESET
13	DB23(R7)
14	DB22(R6)
15	DB21(R5)
16	DB20(R4)
17	DB19(R3)
18	DB18(R2)
19	DB17(R1)
20	DB16(R0)
21	DB15(G7)
22	DB14(G6)
23	DB13(G5)
24	DB12(G4)
25	DB11(G3)
26	DB10(G2)
27	DB9(G1)
28	DB8(G0)
29	DB7(B7)
30	DB6(B6)
31	DB5(B5)
32	DB4(B4)
33	DB3(B3)
34	DB2(B2)
35	DB1(B1)
36	DB0(B0)
37	R0
38	WR0(CX)
39	RS0(CL)
40	CS
41	S0I
42	S0O
43	VSYNC
44	HSYNC
45	DE
46	PCLK
47	XR
48	YD
49	XL
50	TU

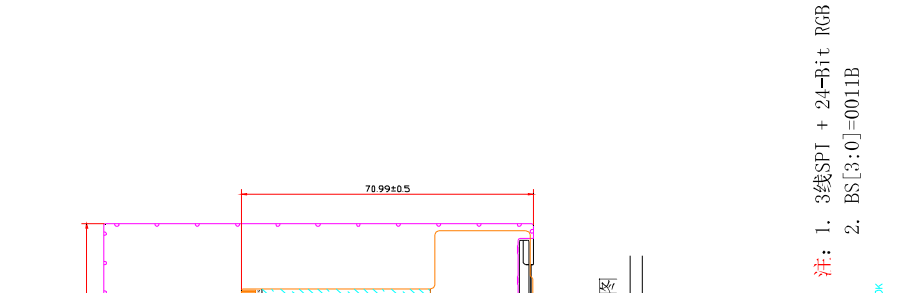

折弯示意图

TSD™ 一 众 显示 TEAM SOURCE DISPLAY	
TITLE:	TST043WVBI-57
DOC. NO.	
PART NO.	
REV. 1.0	SHEET 1 OF 1
SCALE	1:1
UNITS:	mm

DRAWN:	
CHECK:	
DATE	2016.12.16
DESCRIPTION	新制订
APPROVE:	王加林

REV. 1.0	DESCRIPTION	DATE	APPROVE:

Display Type	TFT/Normally white/TRANSMISSIVE
Display Resolution	DDIS: 480RGB*600
Viewing Angle	ALL
LCD Controller/Driver	IL19006E
Logic Voltage	3.3V
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Backlight Spec.	Sales in series 2parallel I=40mA V=15.6V