
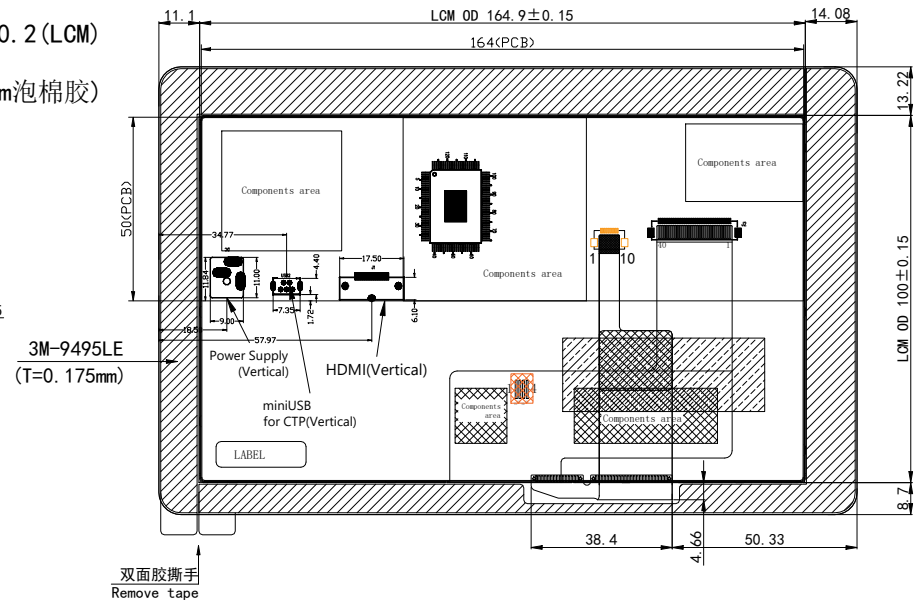


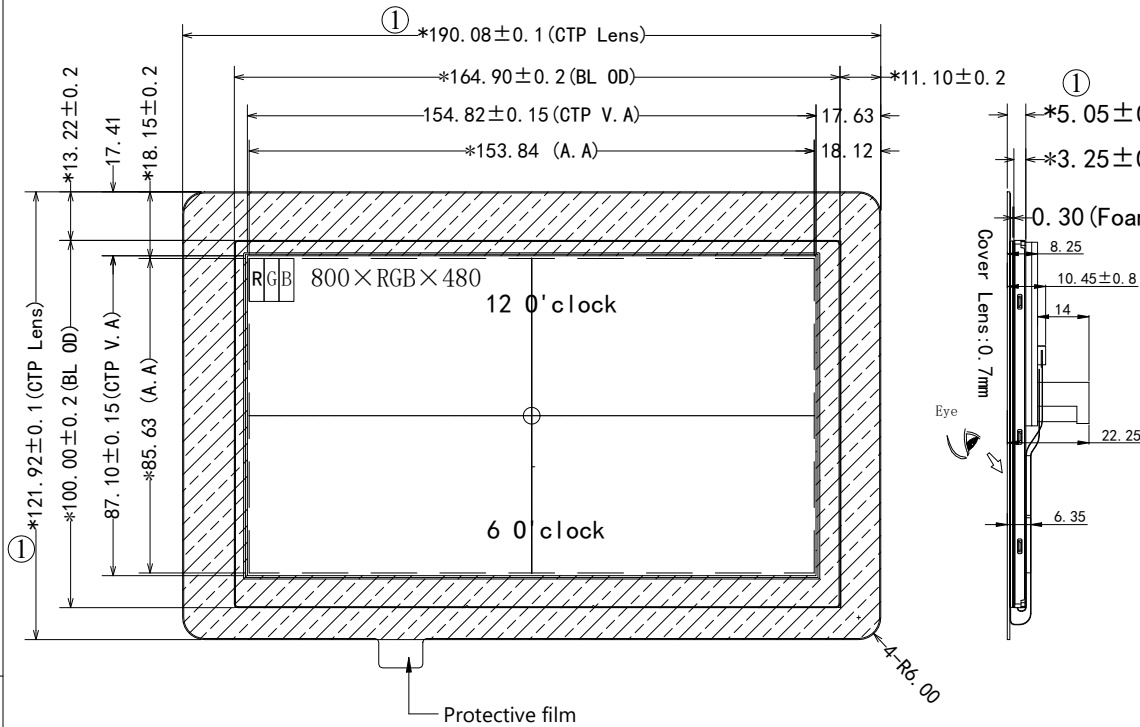

- NOTES:
1. GENERAL TOLERANCE: ± 0.2
 2. () REFERENCE DIMENSION
 3. Important dimension: ①~⑤

LCD Type	7.0" TFT, Transmissive
Resolution	Normally white, TN
View Direction	800(RGB)×480
LCD driver IC	12 o'clock
Color depth	EK9716BD&EK73002ACGB
Interface types	16.7M
Power Supply	HDMI&USB
With TP/Lens	5.0V/1A
Backlight	with CTP
Surface luminance	21 LEDs
Operating temperature	450 cd/m ² (typ)
Storage temperature	-20°C~70°C
Color chromaticity	-30°C~80°C
	[white] x/y:

版本 (Version)	变更记录 (Revise History)	日期 (Date)
A0	Initial release	2021.07.13

设计 (DESIGN)	Hcr
审核 (CHECKED)	Aron
批准 (APPROVED)	Aron
客户承认 (CUSTOMER APPROVAL)	

TITLE:	LCM+CTP+PCBA	页面 (Page) 1 / 1
Drawing No.	TSM070WVBE-101C	单位 (Unit) mm
		比例 (SCALE) 1 : 1
		角度 (Angle)